




304 Smokey Lane North Little Rock, Arkansas 72117 Phone: (501) 945-0354 FAX: (501) 945-0370

Helix Power Tower PLUS **Installation Instructions**

(1994-1995 Mustang 5.0L V-8 H.O. Part #50025)

Important! Read all instructions before you begin installation.

1. Remove air cleaner duct from the air meter.
2. Remove throttle cable, throttle lever, and the throttle assembly bracket.
3. Remove the four air-meter mounting nuts, then remove the air meter and EGR plate.
(Note: be especially careful not to tear or damage the EGR plate's gasket, a replacement is not supplied with this kit)
4. Remove and discard the existing mounting studs.
5. Install the new air meter gasket, Helix Power Tower PLUS (engraved side towards throttle body), and EGR plate using the four new bolts and washers supplied in this kit and torque the assembly to 10 ft/lbs.
6. Reinstall throttle cable, throttle lever, and the throttle assembly bracket.
7. Replace air cleaner duct to the air meter.

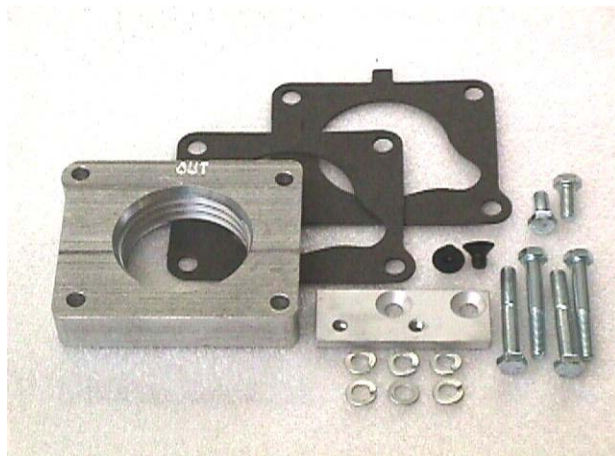

Parts List

- 1 Helix Power Tower PLUS
- 2 Gaskets
- 4 2.25"x5/16" bolts
- 6 5/16" flat washers
- 2 5/16"x 1/2" bolts
- 2 5/16" countersunk bolts
- 1 Throttle bracket extender