



304 Smokey Lane North Little Rock, Arkansas 72117 Phone: (501) 945-0354 FAX: (501) 945-0370
www.StreetandPerformanceElectronics.com


Helix Power Tower PLUS

Installation Instructions

(1993-2000 Honda Civic 1.5/1.6L SOHC, VTEC, & Non-VTEC
1993-1997 Honda Accord 2.2L SOHC, DOHC, VTEC, & Non-VTEC
1993-1996 Honda Prelude 2.2L SOHC, DOHC, VTEC, & Non-VTEC
1994-1997 Del Sol 1.6L SOHC & VTEC Part #91001)

Important! Read all instructions before you begin installation.

1. Remove air inlet assembly from throttle body. Remove two linkage bolts. Remove 2 bolts and 2 nuts securing the throttle body to intake manifold. Remove the two studs from intake manifold.
2. Install a new gasket, Helix Power Tower PLUS (engraved side towards throttle body), and new gasket onto intake manifold. Secure this assembly with the longer bolts and washers (supplied in kit) and torque to 15 ft/lb.
3. Reattach throttle linkage to intake manifold with two 25mm spacers and original bolts under each bolt location. Torque to 10 ft/lb. Readjust throttle linkage. Cable should have 1/8" deflection with throttle fully closed. Reinstall the air cleaner inlet tube assembly. You may extra have extra mounting hardware.

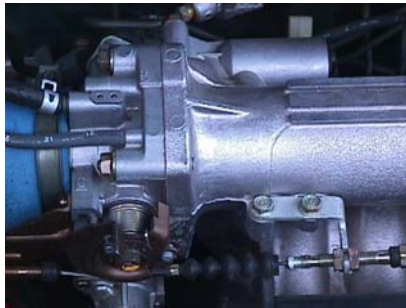

Parts List

- 1 Helix Power Tower PLUS
- 2 Gaskets
- 4 8mmx65mm bolts
- 4 8mm flat washers
- 2 25mm spacers
- 3 6mmx12mm bolts
- 2 6mmx25mm bolts
- 2 6mmx35mm bolts
- 2 6mm washers
- 1 Throttle extender bracket
- 1 6mm nut