



Street & Performance Electronics
304 Smokey Lane
North Little Rock, Arkansas 72117
Phone: (501) 945-0354 FAX: (501) 945-0370
www.StreetandPerformanceElectronics.com

JAAK-SMART


Remote Tailgate Jack Mount Installation Instructions

(1997-2006 JEEP Wrangler TJ Part #799706)

Important!
**Read all instructions
before you begin
installation.**

1. Loosen and remove spare tire from tail gate.
2. Loosen and remove lower tailgate hinge using a TORX T-40 bit. Reinstall the JAAK-SMART tailgate hinge in place of the factory hinge using the factory hardware. Repeat steps for the upper hinge.
3. Slide a 1/2" x 3" stainless steel bolt through slot on both JAAK-SMART tailgate hinges. Head of bolt should be slide in the cavity.
4. Ratchet jack mechanism to lowest point. With possibly some help, carefully, lift jack to the JAAK-SMART tailgate hinge (nose piece of jacking mechanism facing to the right). Allow the 1/2" bolts to engage the jack rail. Place large washer and wing nut on each 1/2" bolt. Center the jack to suit taste. Tighten the wing nut to secure jack to JAAK-SMART jack mounts.
5. Reinstall spare tire on tailgate.

The design of the 799706 JAAK-SMART tailgate hinges allows the user to open tailgate to full 90°. Make sure when tailgate is fully opened, the jack nose does not touch body panel.

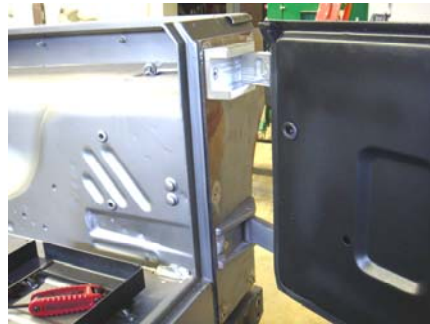

Parts List

- 2 JAAK-SMART tailgate hinges
- 2 1/2" x 3" stainless bolts
- 2 1/2" flat washers
- 2 1/2" wing nuts